

Series RB - 1 13/16" Dia. Concentric Turn-Counting Dial



For more information about this product, visit our website at:
www.potentiometers.com



Series RB Precision Concentric 1 13/16" Diameter Analog Turn-Counting Dial

Features

- Counts up to 15 turns
- One Piece Mounting
- Aluminum Housing
- Housing Finish: Satin Chrome
- Knob Material: Black Nylon
- Dial Finish:
RBB, RB, RBC, RBJ - Black Numerals on Satin Chrome
RBD - White Numerals on Black Matte
- Positive Action Over Center Locking Mechanism

Mechanical Specifications

Diameter: 1-13/16"

Shaft & Bushing Diameter:

RBB - 1/4" Shaft, 1/2" Bushing, 1 set screw

RB - 1/4" Shaft, 3/8" Bushing, 1 set screw

RBC - 1/4" Shaft, 3/8" Bushing, 2 set screws

RBD - 1/4" Shaft, 3/8" Bushing, 1 set screw

RBJ - 1/8" Shaft, 1/4" Bushing, 1 set screw

Depth from face of Panel:

RBB - 1.17" max

RB, RBC, RBD, RBJ - 1.020" max

Shaft Extension from Panel:

RBB - .703" min, .937" max

RB, RBC, RBD, RBJ - .562" min, .812" max

Bushing Extension from Panel:

RBB - .531" max

RB, RBC, RBD - .406" max

RBB - .297" max


Weight, nominal:

RBB - 3.3 oz.

RB, RBC, RBD, RBJ - 3.0 oz

Operating Temp Range: -55°C to +71°C

Series RB - 1 13/16" Dia. Concentric Turn-Counting Dial

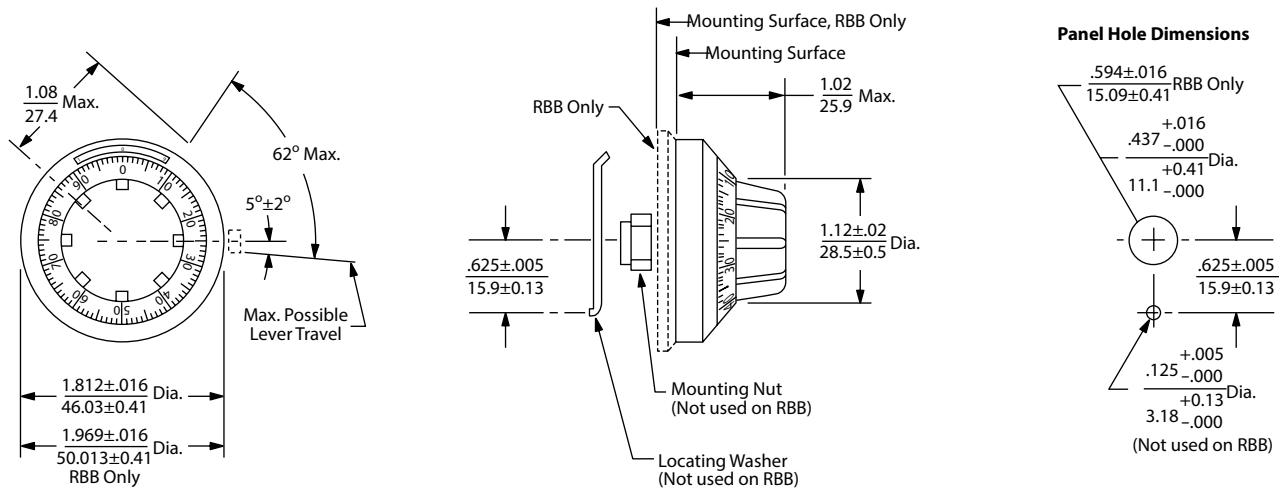

Ordering Information

RBB

Model

- RBB** - 15T, 1/4" Shaft, 1/2" Bushing; 1 setscrew
- RB** - 15T, 1/4" Shaft, 3/8" Bushing; 1 setscrew
- RBC** - 15T, 1/4" Shaft, 3/8" Bushing; 2 setscrews
- RBD** - 15T, 1/4" Shaft, 3/8" Bushing; 1 setscrew
- RBJ** - 15T, 1/8" Shaft, 1/4" Bushing; 2 setscrews

For more information about this product, visit our website at: www.potentiometers.com



© State Electronics

36 State Route 10, STE 6 • East Hanover, NJ 07936-0436
973-887-2550 • Toll Free 1-800-631-8083 • Fax 973-887-1940

<http://www.potentiometers.com>